


## PRODUCT SPECIFICATON MODEL 620

<b>model</b>	Motor type Steering standing/sitting		Brushless DC sitting
<b>weights</b>	Towing capacity Loading capacity Empty weight without battery Weight with standard battery Axle load front Axle load rear	kN kg kg kg kg kg	10 800 575 978 585 393
<b>wheels</b>	Wheel base Track F/R	mm mm	1500 840
<b>dimensions</b>	Total length (without coupling) Total width Total height + cab. Height of coupling Step height Platform dimensions Platform height Road clearance centre wheelbase	mm mm mm mm mm mm mm mm	2850 1000 1696 375 327 1623x950 680 139
<b>performances</b>	Speed without load Speed with max. load Drawbar pull, 1 min. Drawbar pull, 5 min. Drawbar pull, 60 min.	km/h km/h N N N	13 10 2000 1250 400
<b>drive</b>	Brakes: service/parking Brakes: hydr./electr./mech. Brakes: front Brakes: rear Suspension F/R Shock absorbers Battery tension Battery capacity Battery weight, abt. E-motor 60 min. Speedcontrol Transmission	Volt Ah5 kg kW 1:	foot/hand hydr./mech. optional disc springs yes 24 560 230 2,2 electronic 16.2

Spijkstaal Elektro B.V.  
Postbus 9  
3200 AA Spijknisse

Tel. 0181 - 45 70 30  
Fax. 0181 - 62 39 58  
[www.spijkstaal.nl](http://www.spijkstaal.nl)

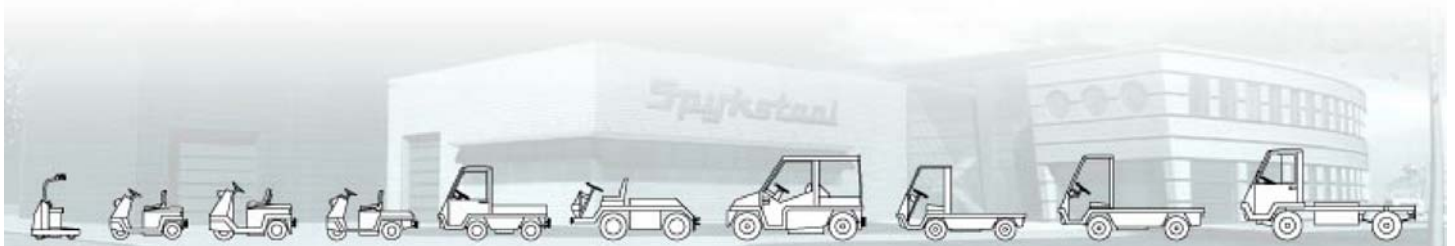

## PRODUCT SPECIFICATON MODEL 630

model	Motor type Steering standing/sitting		DC Serie sitting
weights	Towing capacity Loading capacity Empty weight without battery Weight with standard battery Axle load front Axle load rear	kN kg kg kg kg kg	20 800 575 978 585 393
wheels	Wheel base Track F/R	mm mm	1500 840
dimensions	Total length (without coupling) Total width Total height + cab. Height of coupling Step height Platform dimensions Platform height Road clearance centre wheelbase	mm mm mm mm mm mm mm mm	2850 1000 1696 375 327 1623x950 680 139
performances	Speed without load Speed with max. load Drawbar pull, 1 min. Drawbar pull, 5 min. Drawbar pull, 60 min.	km/h km/h N N N	13 11 2600 1800 880
drive	Brakes: service/parking Brakes: hydr./electr./mech. Brakes: front Brakes: rear Suspension F/R Shock absorbers Battery tension Battery capacity Battery weight, abt. E-motor 60 min. Speedcontrol Transmission	Volt Ah5 kg kW 1:	foot/hand hydr./mech. optional disc springs yes 24 560 230 3.1 electronic 16.2

Spijkstaal Elektro B.V.  
Postbus 9  
3200 AA Spijknisse

Tel. 0181 - 45 70 30  
Fax. 0181 - 62 39 58  
[www.spijkstaal.nl](http://www.spijkstaal.nl)



## PRODUCT SPECIFICATON MODEL 640

<b>model</b>	Motor type Steering standing/sitting		DC Serie sitting
<b>weights</b>	Towing capacity Loading capacity Empty weight without battery Weight with standard battery Axle load front Axle load rear	kN kg kg kg kg kg	20 800 575 978 585 393
<b>wheels</b>	Wheel base Track F/R	mm mm	1500 840
<b>dimensions</b>	Total length (without coupling) Total width Total height + cab. Height of coupling Step height Platform dimensions Platform height Road clearance centre wheelbase	mm mm mm mm mm mm mm mm	2850 1000 1696 375 327 1623x950 680 139
<b>performances</b>	Speed without load Speed with max. load Drawbar pull, 1 min. Drawbar pull, 5 min. Drawbar pull, 60 min.	km/h km/h N N N	15 12 3500 2200 1100
<b>drive</b>	Brakes: service/parking Brakes: hydr./electr./mech. Brakes: front Brakes: rear Suspension F/R Shock absorbers Battery tension Battery capacity Battery weight, abt. E-motor 60 min. Speedcontrol Transmission	Volt Ah5 kg kW 1:	foot/hand hydr./mech. disc disc springs yes 36 390 460 4.5 electronic 16.2

Spijkstaal Elektro B.V.  
Postbus 9  
3200 AA Spijknisse

Tel. 0181 - 45 70 30  
Fax. 0181 - 62 39 58  
[www.spijkstaal.nl](http://www.spijkstaal.nl)



## PRODUCT SPECIFICATON MODEL 650

model	Motor type Steering standing/sitting		DC Serie sitting
weights	Towing capacity Loading capacity Empty weight without battery Weight with standard battery Axle load front Axle load rear	kN kg kg kg kg kg	25 800 575 978 585 393
wheels	Wheel base Track F/R	mm mm	1500 840
dimensions	Total length (without coupling) Total width Total height + cab. Height of coupling Step height Platform dimensions Platform height Road clearance centre wheelbase	mm mm mm mm mm mm mm mm	2850 1000 1696 375 327 1623x950 680 139
performances	Speed without load Speed with max. load Drawbar pull, 1 min. Drawbar pull, 5 min. Drawbar pull, 60 min.	km/h km/h N N N	19 15 3500 2200 1100
drive	Brakes: service/parking Brakes: hydr./electr./mech. Brakes: front Brakes: rear Suspension F/R Shock absorbers Battery tension Battery capacity Battery weight, abt. E-motor 60 min. Speedcontrol Transmission	Volt Ah5 kg kW 1:	foot/hand hydr./mech. disc disc springs yes 48 325 580 6 electronic 16.2

Spijkstaal Elektro B.V.  
Postbus 9  
3200 AA Spijknisse

Tel. 0181 - 45 70 30  
Fax. 0181 - 62 39 58  
[www.spijkstaal.nl](http://www.spijkstaal.nl)

